


CAC系列空气过滤组合(二联件)



符号




订购码

CAC	2010	-	02	D
系列代号	壳体代号		螺纹代号	排水方式
	1010 2010 3010 4010 5010		M5:M5 02:1/4" 03:3/8" 04:1/2" 06:3/4" 10:1"	空白:手动排水 A:差压排水 D:自动排水

技术参数

手动排水型	CAC1010-M5	CAC2010-02	CAC3010-02	CAC3010-03	CAC4010-04	CAC4010-06	CAC5010-06	CAC5010-10
自动排水型	CAC1010-M5D	CAC2010-02D	CAC3010-02D	CAC3010-03D	CAC4010-04D	CAC4010-06D	CAC5010-06D	CAC5010-10D
接管口径	M5×0.8	1/4	1/4	3/8	1/2	3/4	3/4	1
压力表口径	1/16	1/8	1/8	1/8	1/4	1/4	1/4	1/4
额定流量	90	500	2000	2000	4000	4500	5000	5000
环境及流体温度	5-60℃							
保证耐压力	1.5Mpa (15.3kgf/cm ²)							
最高使用压力	1.0Mpa (10.2kgf/cm ²)							
过滤孔径	5 um							
建议用油	透平1号油							
杯材料	聚碳酸酯							
杯防护罩	CAC1000~2000(无) CAC3000~5000(有)							
调压范围	CAC1000:0.05~0.7Mpa (0.51~7.1kgf/m ²)				CAC2000~5000:0.05~0.85Mpa (0.51~8.7kgf/cm ²)			
阀型	带溢流型							
组件 过滤减压阀	CAW1000	CAW2000	CAW3000	CAW3000	CAW4000	CAW4000	CAW5000	CAW5000
组件 油雾器	CAL1000	CAL2000	CAL3000	CAL3000	CAL4000	CAL4000	CAL5000	CAL5000
重量	0.22	0.66	0.98	0.98	1.93	1.99	3.2	3.2

外形尺寸

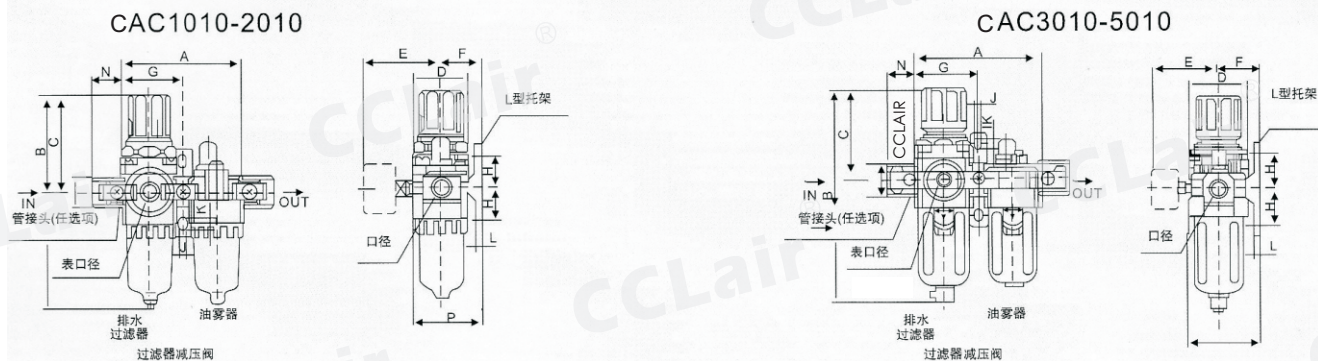

型号	口径	A	B	C	D	E	F	G	H	J	K	L	M	N	P	B
CAC1010	M5×0.8	58	109.5	50.5	25	26	25	29	20	4.5	7.5	5	18	16	38.5	130
CAC2010	1/4"	90	164.5	78	40	56.8	30	45	24	5.5	8.5	5	22	23	50	187.5
CAC3010	1/4", 3/8"	117	211	92.5	53	60.8	41	58.5	85	7	11	7	34	26	70.5	248.5
CAC4010	3/8", 1/2"	154	262.5	112	70	70.5	50	77	40	9	13	7	42	33	88	300
CAC4010-06	3/4"	164	267	114	70	70.5	50	82	40	9	13	7	46	36	88	304
CAC5010	3/4", 1	195	338	116	90	75.5	69.8	97.5	50	12	16	11	55	40	115	—