

2WK系列膜片式常开型电磁阀



概述

先导式膜片式通电闭型
 阀体为黄铜或不锈钢
 工作压力: 0.1~0.8MPA
 额定电压: AC110V/220V/DC24V(50/60HZ)
 电压允许差: ±10%
 品牌: CCLAIR


订购码

2WK - 160 - 15 - S - N - GB - AC220V
 二方口直动式常开型 流量孔径 接管口径 空白: 黄铜 S: 不锈钢 N=NBR: 丁腈橡胶(可省) V=VITON: 氟胶 E=EPDM: 三元乙丙橡胶 GB: 隔爆 空白: 普通 使用电压 见下表

技术参数

| 型号 | 2WK-025-06 | 2WK-040-08 | 2WK-040-10 | 2WK-160-10 | 2WK-160-15 | 2WK-200-20 | 2WK-250-25 | 2WK-320-32 | 2WK-400-40 | 2WK-500-50 |
|------|---|------------|------------|------------|------------|---------------------------|------------|------------|------------|------------|
| 接管口径 | 1/8" | 1/4" | 3/8" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| 流量通径 | 2.5mm 4mm | | 4mm | 16mm | 16mm | 20mm | 25mm | 32mm | 40mm | 50mm |
| 使用流体 | 空气、水、油、中性气体液体 | | | | 电压 | AC110/220V/DC24V(50/60HZ) | | | | |
| 动作方式 | 先导式 | | | | 形式 | 常开型 | | | | |
| 阀体材质 | 黄铜或不锈钢 | | | | 压力 | 水液、空气: 0.1~0.8MPA | | | | |
| 密封材质 | 标准: NBR 80℃以下流体温度 可配: EPDM 120℃以下温度 VITON 耐弱酸弱碱或 150℃以下温度 | | | | | | | | | |

外形尺寸

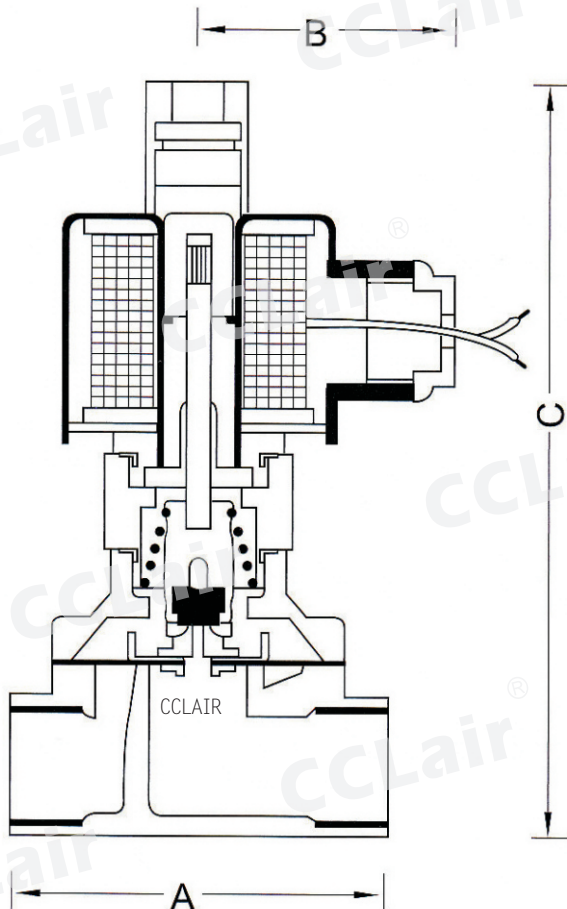

| 型号 | A | B | C | 接管口径 |
|--------------|-----|-----|-----|---------|
| 2WK-025-6 | 40 | 42 | 79 | G1/8" |
| 2WK-040-8 | 40 | 42 | 79 | G1/4" |
| 2WK-040-10 | 51 | 55 | 105 | G3/8" |
| 2WK-160-10 | 62 | 55 | 123 | G3/8" |
| 2WK-160-15 | 62 | 55 | 123 | G1/2" |
| 2WK-200-20 | 67 | 55 | 134 | G3/4" |
| 2WK-250-25 | 86 | 73 | 138 | G1" |
| 2WK-320-32 | 90 | 77 | 151 | G1 1/4" |
| 2WK-400-40 | 106 | 87 | 170 | G1 1/2" |
| 2WK-500-50 | 123 | 93 | 182 | G2" |
| 2WK-040-10S | 69 | 57 | 140 | G3/8" |
| 2WK-160-15S | 69 | 57 | 140 | G1/2" |
| 2WK-200-20S | 73 | 57 | 145 | G3/4" |
| 2WK-250-25S | 98 | 77 | 155 | G1" |
| 2WK-320-32S | 115 | 87 | 161 | G1 1/4" |
| 2WK-400-40S | 121 | 94 | 170 | G1 1/2" |
| 2WK-500-50S | 168 | 123 | 195 | G2" |
| 2WK-160-15SF | 107 | 95 | 170 | DN15 |
| 2WK-200-20SF | 107 | 102 | 170 | DN20 |
| 2WK-250-25SF | 138 | 108 | 185 | DN25 |
| 2WK-320-32SF | 149 | 131 | 220 | DN32 |
| 2WK-400-40SF | 160 | 141 | 240 | DN40 |
| 2WK-500-50SF | 186 | 160 | 260 | DN50 |